


# Full Height Turnstile

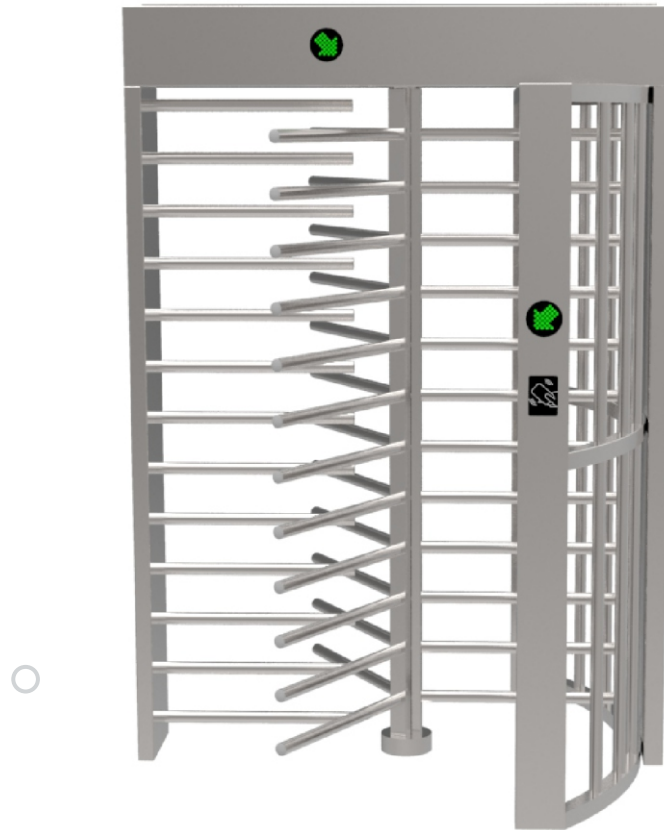

## FH2400

### FEATURES

Designed for seizure operation with aesthetics in mind

Corrosion protected S/S frame

Minimal exposed hardware

Heavy gauge materials meeting ASTM standard

Consist of rotar assembly and shield

Assembly, barrier section, mechanism housing and ceiling plate

Single and Bi-directional operations supported

Integration support with any RFID/Biometric Reader through NO input

IP44 Ingress Protection Rating



LED Direction Indicators

INGRESS PROTECTION RATING

IP44



100% Duty Cycle



Delay Time



Wired Terminal

**TECHNICAL SPECIFICATIONS****FH2400**

Parameter	Specifications
Power Supply	100V~240V AC
Power consumption	30W
Operating temper range	-25~+70°C
Protection level	IP44
Humidity	95%
Solenoid	24v DC 100%
Signal Output	12v pulse
Passage width	<650mm
Frequency	50 or 60 Hz
Electro-magnetic drive	DC
Dimension	1400 x 1200 x 2310 mm
Certifications	CE, FCC, ROHS

\*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

