

Features

- Dimension: 1400x300x990mm
- Unlock time : 0.2s
- Pass rate: 35 person/min
- Pass width : ≤550mm
- Input: 100V~240V
- Motor voltage: 24v
- Environment: -25~+70
- Power consumption: 35w




Benefits

All the gates models are space efficient security barriers, with a compact design, yet offer sufficient space to integrate any access control system. They can be mounted with display, passage counter, card reader, token operation traffic lights, command console, alarm system against unauthorised entries, interfaced with a PC through a RS232(RS485, TCP-IP) line. The unique swing arm feature provides a fail-safe safety solution in case of an emergency or power failure, providing egress in case of crisis evacuations. Durability with minimal maintenance means years and millions of trouble free passages. The gate creates a secure environment in. for example, a reception area. Our gates are used in applications including stadiums and arenas, perimeter and interior security, recreation and amusement parks, retail crowd control, transit fare collection and lobby access control.

Diagram



Dimension

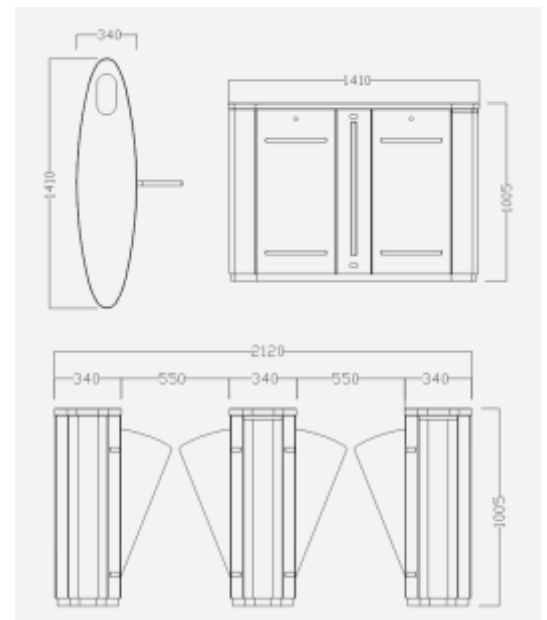

*Color/Look may vary from actual product.